


# SIMO X

## User Guide

## Setup SIMO X

- Hold the Power Button **1** for 2 seconds on each unit until blue LED turns on
  1. Master Unit LED will blink blue indicating Pairing Mode is enabled
  2. All subunits will automatically pair to the master units
- Press and hold the Bluetooth Button **2** to search for a device
  1. Go to your device's Bluetooth settings menu and choose 'SIMO X'
  2. Once connected, 'Pairing Successful' Tone will play from Master Unit and LED will change to Solid Blue

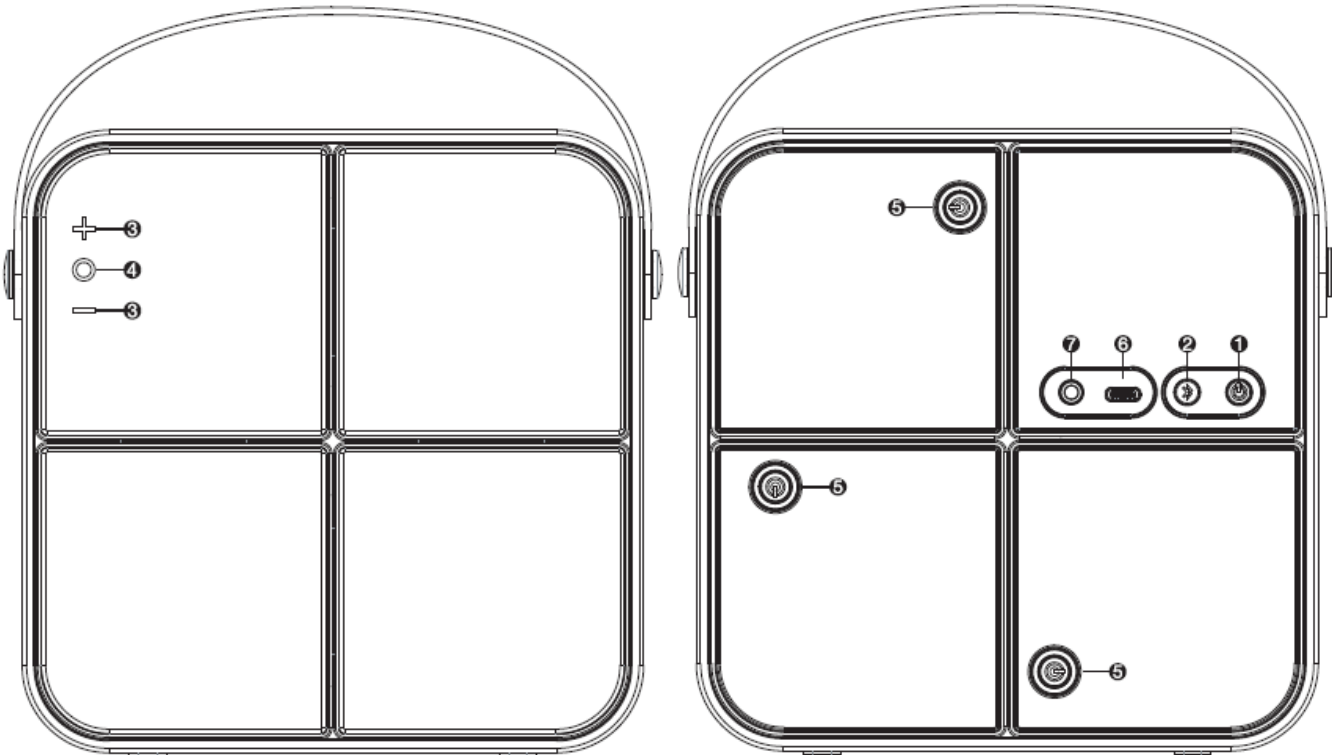

## Buttons

- Master Unit
  1. Power Button **1**
    - i. Hold for 2 seconds to switch on/off the master unit
    - ii. 'Power Tone' will play indicating successful power on/off
  2. Bluetooth Button **2**
    - i. Press and hold the button for 2 seconds to search for a new device to pair
    - ii. Quickly triple (3) tap to disconnect from a device and enter Pairing Mode
    - iii. Single tap to toggle between Bluetooth Mode and AUX Mode
  3. Volume Buttons **3**
    - i. Single tap either button to adjust the volume of all units
  4. Play/Pause Button **4**
    - i. Single tap to play/pause audio
    - ii. Quickly double tap to skip to next song
    - iii. Quickly triple tap to restart or return to last played song

- Sub Unit
  1. Power Button <sup>5</sup>
    - i. Hold for 2 seconds to switch on/off the master unit
    - ii. 'Power' Tone will play indicating successful power on/off
      1. If not connected to Master Unit and LED is blinking blue, quickly triple tap to reconnect
      2. 'Pairing Successful' Tone will play indicating successful reconnection to Master Unit

#### Charging Port: USB Type-C Charging Port <sup>6</sup>

- Use the provided USC Type-C charging cord to charge your SIMO X device. SIMO X is compatible with 110V and 240V outlets
- When charging, the red LED lights on SIMO X unit turn on, and automatically turn off once fully charged.
- We recommend using the 5V/2A power adapter for the optimal charging experience

#### Charging

- When your devices batter is low, SIMO X will interrupt audio playing to periodically play a tone indicating that the speakers require charging
- To charge your system, first combine all units together and make sure all contact charging spots are lined up
- Insert the power cord into the USB Type-C charging port
- If one of the red lights on a unit doesn't turn on:
  1. Check if the units are properly combined
  2. Gently wipe the charging spots with a dry cloth
  3. Rearrange the units into Dock Setup and plug in power cord
- **Note:** Full charging time can take 3-4 hours
- Charging LED Indicators:
  1. Blinking Red: Low Battery
  2. Solid Red: Charging in progress
  3. If all LEDs are off and the device Power Cord is Plugged In, this indicates the batter is Fully Charged

#### Aux Port <sup>7</sup>

- Connect an Aux cord between SIMO X's Aux Port and a compatible device
- After inserting the Aux cord, single tap the Bluetooth Button <sup>2</sup> to switch from Bluetooth Mode to Aux Mode
- Single tap the Bluetooth Button again to return to Bluetooth Mode

#### LED Indicators

- Master Unit
  1. Solid Blue: Connected to a compatible device
  2. Slow Blinking Blue: Aux Mode enabled, awaiting connection
  3. Fast Blinking Blue: Pairing Mode enabled, ready to pair to a compatible device
- Sub Unit

1. Solid Blue: Connected to a Master Unit
2. Blinking Blue: Pairing Mode enabled, ready to pair to a Master Unit

#### Surround Sound Setup

- Place on a flat surface facing up and slide off the outer case from the speakers
- Once the outer case is removed, simply pull apart to separate into four units
- Place the left channel units on your left and the right units on your right
- Connect your device to SIMO X and enjoy

#### Dock Setup

- Combine all units together via magnetic connection, ensuring that all units are facing forward, and that the contact charging spots are lined up
- Place on a flat surface facing up and slide on the outer case around the speakers
- Take SIMO X with you and enjoy audio on the go

#### Sub Unit Standalone Setup

- Turn on single Sub Unit of SIMO X speaker by long pressing the Sub Unit power button <sup>5</sup>
- Quickly triple tap the Power Button <sup>5</sup> of the Sub Unit.
  1. LED Indicator should begin fast blinking blue
- Go to your device's Bluetooth settings menu and choose the subunit device listed that you are trying to connect to.
  1. Once connected, 'Pairing Successful' Tone will play from the Sub Unit.
  2. Make sure to disconnect from the 'SIMO' device used for Master Unit pairing.
- Use Sub Unit as a standalone, individual speaker

#### Enable Multiple SIMO X Pairing

- Turn on the Master Unit of first SIMO X speaker by long pressing the Sub Unit power button <sup>1</sup>
- Turn on the Sub Units you would like to pair from the additional SIMO X system
- Quickly triple tap the Power Button of a Sub Unit, which will allow them to pair to the new Master Unit that is in range. Repeat this step for each additional Sub Unit you wish to pair.

#### Disabling Multiple SIMO X Pairing

- Turn on the Master Unit of first SIMO X speaker by long pressing the Sub Unit power button <sup>1</sup>
- Turn on Sub Units of the second SIMO X speaker(s)
- For any Sub Units that do not natively connect to their respective Master Unit and continue to have an LED blinking blue, quickly triple tap the Power Button. These Sub Units will then re-pair to their original Master Units

## **Safety and Handling – Important safety information**

Handle SIMO and case with care. SIMO X contains sensitive electronic components including batteries, and can be damaged or cause injury if dropped, burned, punctured, crushed, disassembled, or if exposed to excessive heat and liquid. Do not use damaged SIMO X units.

### Batteries

- Don't attempt to replace SIMO's batteries by yourself - you may damage the batteries, which could cause short circuit, overheating and potentially injury.

### Charging

- Charge the case with the USB Type-C cable and a power adapter. Only charge with an adapter that is compliant with the applicable international and regional safety standards, including IC 60950. We recommend using a 5V/2A power adapter for the optimal charging time. Using power adapters with lower power ratings might result in longer charging time, or cause SIMO to be undercharged.
- Using damaged cables or chargers, or charging when moisture is present, can cause fire, electric shock, injury, or damage to SIMO

### Individual Unit handling

- Place the master unit and sub units on a flat surface with the rubber side down. To prevent short circuit, do not place the units on rough, raw metal surfaces such as steel wool. Directly connecting the contact charging spots can cause short circuit, overheating, fire or damage to SIMO's electronic components.